

Model 3050-AM Moisture Analyzer

FEATURES

- Quartz-crystal technology provides accuracy, speed, and calibration stability
- On-line verification system confirms analytical performance
- Intuitive, easy-to-use interface with keypad and display allows quick access to all operating variables
- Multi-gas compatibility is ideal for periodic testing of multiple sample gases
- Menu-driven gas selection eliminates all manual adjustments

AMETEK's Model 3050-AM sets the ease-of-use standard for accurate, ppmv moisture analysis. This analyzer offers a truly remarkable combination of performance features: exceptional accuracy, multi-gas compatibility, fast response speed, and wide measurement range.

The 3050-AM is ideal for process moisture measurement applications including process dryers, instrument air dryers, air separators, industrial gas production, and quality assurance. Equipped with an on-line verification system, this state-of-the-art analyzer is designed to rapidly build and maintain operator confidence in its analyses. The verification system allows you to challenge the analyzer's sensor at will using a zero gas to check its baseline stability to confirm the sensor's stability and sensitivity to sub-ppmv moisture concentrations.

SUPERIOR PERFORMANCE

Multi-gas compatibility

The Model 3050-AM combines the excellent multi-gas compatibility of the Model 2850 with a new, easy-to-use operator interface. It is completely compatible with virtually all non-corrosive gases including inerts (He, Ar,



Model 3050-AM Moisture Analyzer

Ne, Xe, Kr), H₂, O₂, N₂, NO, CO₂, air, and many specialty gases such as sulfur hexafluoride. A single, simple menu selection is all that is needed to re-configure the 3050-AM for a new gas type. There are no other necessary adjustments on the analyzer.

So, if you want to analyze industrial, high purity, or semiconductor grade gases and need an instrument that is compatible with a wide range of gases, turn to the Model 3050-AM.

Exceptional accuracy

The Model 3050-AM is perfect for moisture applications that require accurate results. The accuracy of this analyzer, $\pm 10\%$ of reading, is exceptional when you consider that a new aluminum oxide sensor is typically specified with an accuracy of $+72\%/-57\%$ of reading (converted from the dew point specifications) for a moisture concentration of 0.1 ppmv at 14.7 psia. Quartz-crystal technology and an on-line verification system combine to constantly provide assurance that the analyzer is continuing to provide you with this superior level of performance.

On-line verification system confirms analytical performance

The on-line verification system in the 3050-AM uses an internal zero verification system. The zero verification system strips the moisture from the sample gas prior to analysis by the sensor. This allows you to verify the zero point of the sensor's calibration, enhancing accuracy and user confidence when monitoring in the critical 0 to 10 ppmv range. This system is entirely internal to the analyzer eliminating the need to break process connections along with the "wet-up" that would occur from ambient moisture. An alarm contact alerts the operator if the analyzer fails verification. The verification sequences can be started on a programmable schedule or on manual demand.

Fast response speed

The Model 3050-AM responds quickly to both increases and decreases in moisture concentration because the analyzer employs a unique non-equilibrium measurement technique. This technique continuously exposes the sensor to wet sample gas followed by dry sample gas to make its analysis. With this technique, the analyzer never needs to wait for the sensor to reach equilibrium to establish its accurate measurement. Importantly, this technique is based upon the defined, repeatable physical properties of moisture transport to/from the sensor's surface. This means that quartz-crystal technology *never* employs the questionable prediction software often used to "speed-up" other, more limited technologies.

AMETEK's unique technique makes possible accurate moisture readings far faster than would be possible under equilibrium, or continuous "wet" sample gas, operating conditions.

Wide measurement range

The Model 3050-AM accurately measures from 0.1 ppmv to 100 ppmv. While this is the recommended usable range, the analyzer will provide measurements up to 1000 ppmv so that you can capture the nature of a process upset.


TYPICAL APPLICATIONS

Industrial gas production and quality assurance

Compressed industrial gas suppliers need accuracy to certify compressed gas quality. They need fast dry-down response to ensure that the analyzer comes back on-line quickly after a slug of moisture, and they need complete multi-gas compatibility. Compare the performance of your present moisture analyzer with the Model 3050-AM: exceptional accuracy, less than 5 minute dry-down time in the 100 to 1 ppmv range, and compatibility with virtually all compressed gases, including carbon dioxide and oxygen. Finally, one analyzer which meets all your analytical and operational needs.

Cryogenic air separation

Cryogenic separation produces inherently dry gas, typically on the order of a few hundred ppbv. Suddenly increasing moisture is a widely used alarm condition because of the danger of catastrophic freeze-up and the downtime it causes. The Model 3050-AM answers this need perfectly with excellent sensitivity, fast response to increasing moisture, and reliable measurement in the critical 100 ppbv to 1 ppmv alarm range.

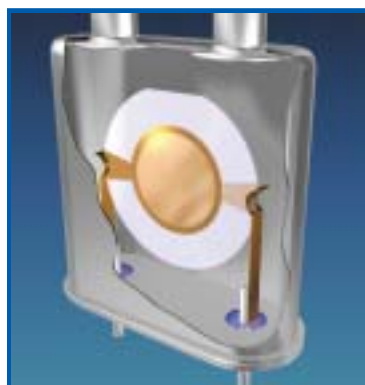

THE QUARTZ-CRYSTAL SENSOR

The heart of the 3050-AM analyzer is a quartz-crystal microbalance (QCM) sensor and analysis technique developed by AMETEK specifically for highly accurate moisture measurements. The sensor consists of a pair of electrodes that support the QCM sensor. When voltage is applied to the sensor, a very stable oscillation occurs.

The faces of the oscillator are covered with a hygroscopic polymer. As the amount of moisture sorbed onto the polymer varies, the mass of the QCM changes producing a corresponding change in the frequency of oscillation. These easily measurable changes have a direct relation to the moisture concentration of the sample gas.

Process dryers

Many industrial applications use desiccant dryers to remove moisture from process gases. Typically, these dryers operate in parallel; when the first dryer becomes saturated, the process gas is switched to the second while the first is regenerated. Used as the dryer outlet monitor, the Model 3050-AM provides internal

measurement verification, fast wet-up response time, fast dry-down response time, wide measurement range, and superior accuracy. Plant operators can extend the dryer regeneration cycle, reducing regeneration costs, using the reliable, accurate Model 3050-AM.

PERFORMANCE SPECIFICATIONS

Compatible Gases: Inerts (He, Ar, Ne, Xe, Kr), H₂, O₂, N₂, NO, CO₂, air, and some specialty gases such as sulfur hexafluoride. CO₂ requires a custom measurement cell. (Contact the factory to confirm compatibility with other gases.)

Range: 0.1 to 100 ppmv. Indicates trend to 1000 ppmv. Display is software settable to show ppmv, or dew point (requires pressure input).

Outputs:

- Four-line digital display.
- A fully programmable 4-to-20 mA analog output
- RS485/RS232 serial communication

Alarms: Three dry contact closures, 32 VDC maximum, 1 A noninductive load (moisture, data valid, and system alarm). Alarm signals are available on the RS485 interface.

Limit of Detection: 0.1 ppmv

Accuracy: ±10% of the reading, whichever is greater

Response Time: 63% in 5 minutes (as measured for a 0 – 5 ppmv step change)

Inlet Pressure: 20 to 50 psig (1.38 to 3.45 bar)

Exhaust Pressure: Atmospheric

Sample Flow Requirements: less than 150 ml/min at STP

Sample Gas Temperature: 32° to 212°F (0° to 100°C)

Ambient Operating Range: 41° to 122°F (5° to 50°C), 90 percent relative humidity, non-condensing, noncorrosive atmosphere. Optimal performance in sub-ppmv applications is achieved when the ambient temperature is maintained within ±2°C.

Software Features: Displays ppmv moisture reading or dew point, timer status, and instrument status

Utility Requirements:

- 120/240 volts, 47 to 63 Hz, 200 W
- Instrument Air: 70 to 100 psi (5 to 7 Bar)

Mounting Configuration: 19-inch rack / bench-top installation

Dimensions: (W x H x D): 19 x 5.25 x 16.5 in. (48.3 x 13.3 x 41.9 cm)

Net Weight: 18 lbs. (8.2 kg)

Approvals and Certifications: Non-hazardous. Complies with all relevant European Directives

One of a family of innovative process analyzer solutions from AMETEK Process Instruments. Specifications subject to change without notice.



CANADA
2876 Sunridge Way N.E.
Calgary, AB T1Y 7H9
Ph. 403-235-8400
Fax 403-248-3550

USA - Delaware
455 Corporate Blvd.
Newark, DE 19702
Ph. 302-456-4400
Fax 302-456-4444

USA - Pittsburgh
150 Freeport Road
Pittsburgh, PA 15238
Ph. 412-828-9040
Fax 412-826-0399

USA - Texas
9750 Whithorn Drive
Houston, TX 77095
Ph. 281-463-2820
Fax 281-463-2701

CHINA
Ph. 86 21 6426 7049
Fax 86 21 6426 7054

FRANCE
Ph. 33 1 30 68 69 20
Fax 33 1 30 68 69 29

GERMANY
Ph. 49 21 59 91 36 0
Fax 49 21 59 91 3680

MIDDLE EAST - Dubai
Ph. 971-4-881 2052
Fax 971-4-881 2053

