

# Model 6010 UltraThin Hall-Effect Probe



STD61-0202-XX

## Description

The Model 6010 UltraThin Hall-effect gaussmeter probe represents the latest innovations and state-of-the-art designs from the world leader in magnetic measurement equipment. Utilizing a very thin instrument grade Hall sensor, with an active area of 0.005" (0.127 mm), the UltraThin probe provides DC to 200 Hz magnetic field measurements up to 30 kG with a linearity accuracy of 0.5% of reading.

The Model 6010 UltraThin Hall-effect probes are precision solid-state magnetic field sensors, designed for use with F.W. Bell 6000 Series gaussmeters, to provide stable and repeatable transverse magnetic flux density measurements.

## Applications

- Loudspeaker Voice Coil Inspection
- Point Source Measurement
- Quality Control
- Multi-Poled Magnets
- Miniature Magnet Inspection
- Research & Development
- Thin Air Gap Assemblies
- Medical Applications
- Environmental Measurements

## Specifications

### Electrical

Linearity Accuracy .....	0.5% to 30 kG
Active Area .....	0.005" (0.127 mm), Diameter, Nominal
Temperature Range (Operating) .....	0° C to +75° C
Temperature Stability	
Zero .....	± 0.55 gauss/°C (max), ± 3µV/°C
Calibration .....	-0.07%/°C
Frequency Response .....	DC to 200 Hz

### Mechanical

Stem Base .....	G10 Rigid Glass Epoxy
Stem Tip .....	Kapton Lead Strip
Cable Length (standard sizes) .....	5', 15' and 30'

Note: Due to continuous process improvement, specifications subject to change without notice




# Hall Effect Probes


## Mechanical Dimensions

All dimensions are in inches (millimeters)


TOP VIEW

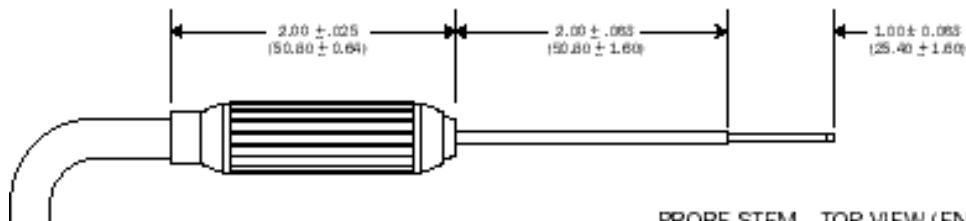


PROBE STEM - TOP VIEW (ENLARGED)

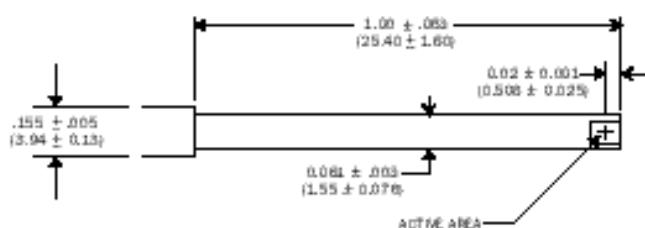


SIDE VIEW

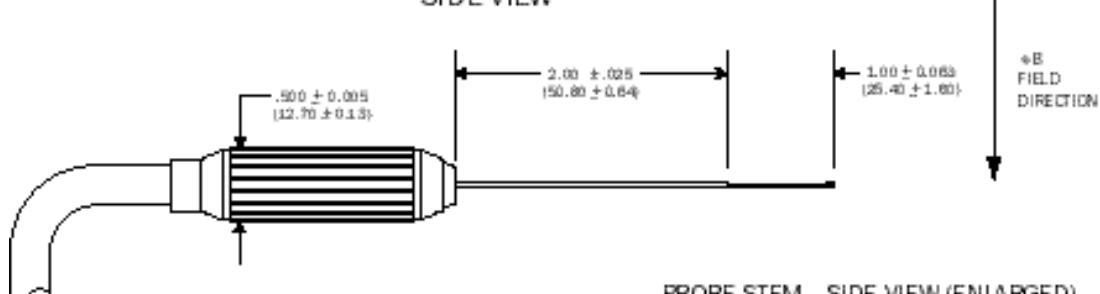

PROBE STEM - SIDE VIEW (ENLARGED)

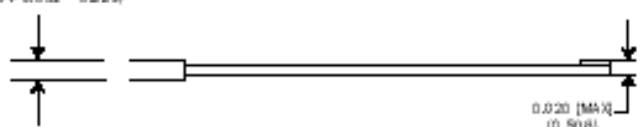

CONNECTOR

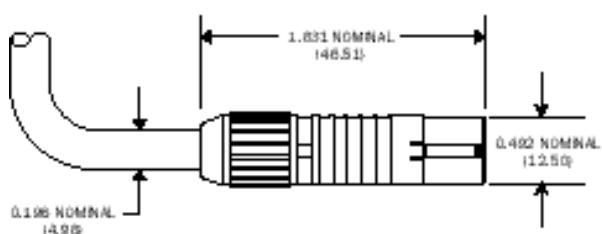

Note: Due to continuous process improvement, specifications subject to change without notice.

